

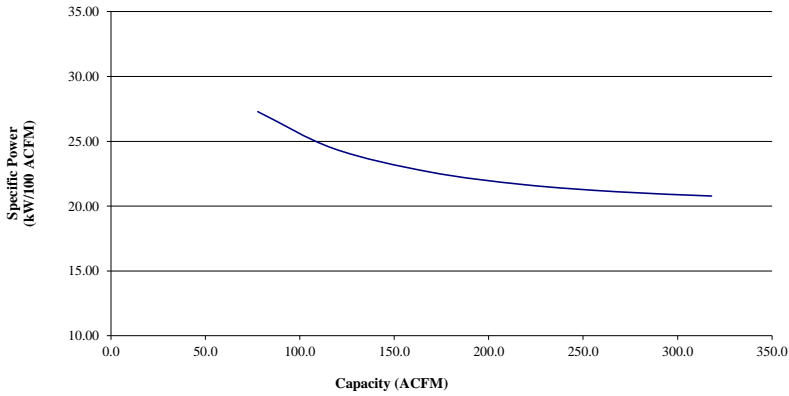
COMPRESSOR DATA SHEET

**Gardner
Denver**

In Accordance With Federal Uniform Test Method for Certain Lubricated Air Compressors

Rotary Compressor: Variable Frequency Drive

MODEL DATA - FOR COMPRESSED AIR

1	Manufacturer: Gardner Denver			
2	Model Number: L55RS-75hp-145psi		Date:	01/27/23
	<input type="checkbox"/> Air-cooled	<input checked="" type="checkbox"/> Water-cooled	Type:	Screw
			# of Stages:	1
3*	Full Load Operating Pressure ^b		145	psig ^b
4	Drive Motor Nominal Rating		75	hp
5	Drive Motor Nominal Efficiency		93.6	percent
6	Fan Motor Nominal Rating (if applicable)		0.9	hp
7	Fan Motor Nominal Efficiency		70.0	percent
8*	Input Power (kW)		Capacity (acfm) ^{a,d}	Specific Power (kW/100 acfm) ^d
	66.07		318.0	20.78
	56.70		268.7	21.10
	47.39		218.9	21.65
	38.17		168.6	22.63
	28.84		118.1	24.43
	21.21		77.8	27.28
9*	Total Package Input Power at Zero Flow ^{c, d}		6.6	kW
10	Isentropic Efficiency		74.09	%
11	 <p>Note: Graph is only a visual representation of the data in Section 8 Note: Y-Axis Scale, 10 to 35, + 5kW/100acfm increments if necessary above 35 X-Axis Scale, 0 to 25% over maximum capacity</p>			

*For models that are tested in the CAGI Performance Verification Program, these items are verified by the third party administrator
 Consult CAGI website for a list of participants in the third party verification program: www.cagi.org



- Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; ACFM is actual cubic feet per minute at inlet conditions.
- The operating pressure at which the Capacity (Item 8) and Electrical Consumption (Item 8) were measured for this data sheet.
- No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- Tolerance is specified in ISO 1217, Annex E, as shown in table below:
 NOTE: The terms "power" and "energy" are synonymous for purposes of this document.

Member

Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	Zero Flow Power
m ³ / min	ft ³ / min	%	%	%
Below 0.5	Below 17.6	+/- 7	+/- 8	
0.5 to 1.5	17.6 to 53	+/- 6	+/- 7	+/- 10%
1.5 to 15	53 to 529.7	+/- 5	+/- 6	
Above 15	Above 529.7	+/- 4	+/- 5	

ROT 031.1